

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/020812 A1

(51) International Patent Classification⁷: **A61B 5/04**

(21) International Application Number:
PCT/US2004/027155

(22) International Filing Date: 19 August 2004 (19.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/647,161 21 August 2003 (21.08.2003) US

(71) Applicant and

(72) Inventor: **CHANG, Alexander, C.** [US/US]; 5301 Waverly Drive #159, Palm Springs, CA 92264-6174 (US).

(74) Agents: **LOVEJOY, Brett, A.** et al.; Jones Day, 222 East 41st Street, New York, NY 10017-6702 (US).

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, Published:

— with international search report

[Continued on next page]

(54) Title: ECG MONITORING METHODS AND APPARATUS

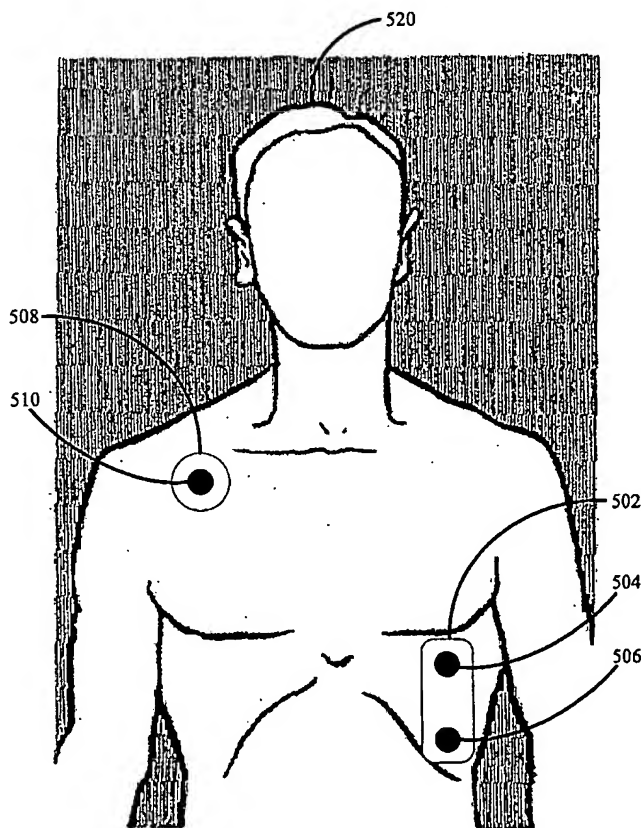

(57) Abstract: Apparatus and methods for electrocardiogram measurement. A first (504) and second (506) electrode are disposed on a first non-conductive pad (502) and independently represent any one of the V₁, V₂, V₃, V₄, V₅, or V₆ precordial positions. A third electrode (510) disposed on a second non-conductive pad (508) is a right arm (RA) electrode and is positioned on or close to the right arm of a subject. A fourth electrode is disposed on a third non-conductive pad and is a left arm (LA) electrode that is positioned on or close to the left arm of the subject. A fifth electrode is disposed on a fourth non-conductive pad and is a left leg (LL) electrode that is positioned on or close to the left leg of the subject. An electrocardiological measuring apparatus is in electrical communication with the first, second, third, fourth, and fifth electrodes. The electrocardiological measuring apparatus measures a unipolar lead or an augmented lead at a first time interval and a bipolar lead at a second time interval.

WO 2005/020812 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*